




# Hydro-Max 13T-36 3 Phase

## Hydraulically Driven AC Generators

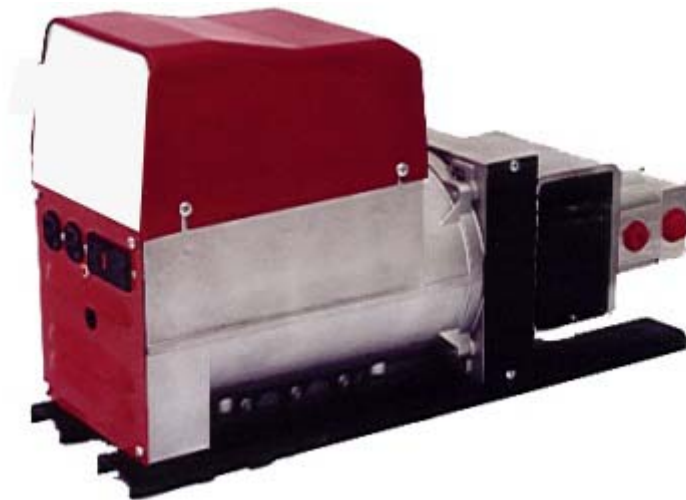

### Quality Features

Compact. Only 8"W x 14"H x 28"L

Environmentally safe & non-polluting

Maintenance free

Weights only 163 Lbs

Mounts in any position

*Patented* motor mount

Pressure compensating flow regulator mounted directly to motor. (Eliminates connecting flow regulator to motor with expensive hoses & couplings)

Easily reconnectable from 120V to 120/208 V.

Our hydraulically-driven *welder generators* are unmatched in size and performance. At this time, we have 4 models ranging from 6.9 to 13Kva.

### Technical Information

Power	=	13 Kva
Volt	=	120V or 120/208V
Frequency	=	60 Hz
Amperage	=	84A @ 120
Speed	=	3600
Insulation	=	F & H
Phase	=	Three Phase
Power Factor	=	.8
Flow	=	19 GPM
Pressure	=	2000 PSI
Motor	=	Pressure balanced gear with anti-cavitation device
Flow Regulator	=	Pressure Compensating (mounted directly to motor) <i>a exclusive Getec design</i>