




Hydro-Max 6.9T-36 3 Phase

Hydraulically Driven AC Generators

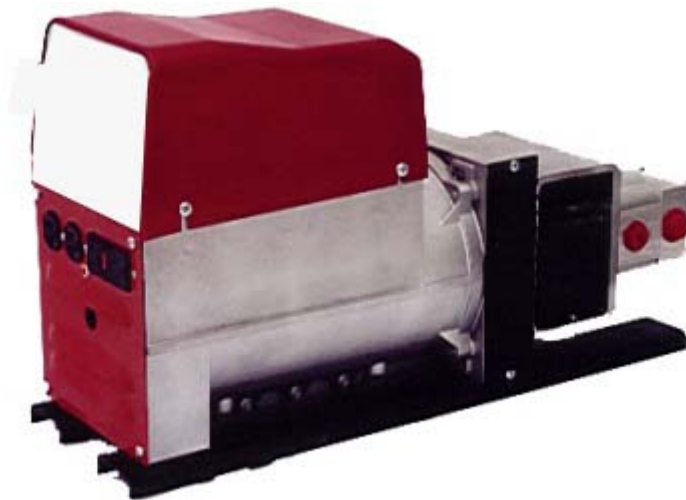

Quality Features

Compact. Only 8"W x 14"H x 27"L

Environmentally safe & non-polluting

Maintenance free

Weights only 143 Lbs

Mounts in any position

Patented motor mount

Pressure compensating flow regulator mounted directly to motor. (Eliminates connecting flow regulator to motor with expensive hoses & couplings)

Easily reconnectable from 120V to 120/208 V.

Our hydraulically-driven *welder generators* are unmatched in size and performance. At this time, we have 4 models ranging from 6.9 to 13Kva.

Technical Information

Power	=	6.9 Kva
Volt	=	120V or 120/208V
Frequency	=	60 Hz
Amperage	=	33A @ 120
Speed	=	3600
Insulation	=	F & H
Phase	=	Three Phase
Power Factor	=	.8
Flow	=	12 GPM
Pressure	=	2000 PSI
Motor	=	Pressure balanced gear with anti-cavitation device
Flow Regulator	=	Pressure Compensating (mounted directly to motor) <i>a exclusive Getec design</i>